## [OPTI]<sup>™</sup>GoboPro+ LED



**Technical Information** 

Following the success of the GoboPro and GoboShow projectors, [OPTI] Kinetics presents their new replacement LED Gobo Projectors. [OPTI] Kinetics first waterproof Gobo Projectors will be able to project static and rotating images simultaneously or individually. There are three models to choose from and supplementary accessories. These powerful gobo projectors can use any 52.5mm diameter object lens, can be used for internal or external projectors and are perfect for Retail, Promotion, DJ, Clubs, Bars, Restaurants and Show Room applications. Manufactured with long life LEDs.


#### Features

- Projector Static and/or Rotating Image
- Waterproof IP 65 Rated
- Cool and Virtually Silent
- Bright Long Life LED
- Tamper Resistance
- Supports DMX Control.


NAME:[OPTI] GoboPro+ LED ProjectorPart Number:FG2120Gobo Projection:Static and/or rotating image. Integral Rotator for Cassette.Lens Size:Projector takes 52.5mm diameter object lenses Other lenses available*Lens options:45, 60, 85, 120, 150Focus:ManualLight Source:120W LEDBrightness Output:8000 LumensIlluminance at 1 m:3800 LuxColour temperature (Kelvin):7500 KColour of Projector:BlackGobo Size:50mm o/d gobo fitted into an OPTI cassette bearing. Image size: 40mmControl:Manual. DMX AdapterRemote control:Dimming, contol of all effect paramaters.Protection RatingIP 65 with front cover fitted. Suitable for outdoor use.Power Supply:Li34 H25 W14 0D10 CMWeight:3.5 Kq		
ControlStatic and/or rotating image. Integral Rotator for Cassette.Gobo Projection:Static and/or rotating image. Integral Rotator for Cassette.Lens Size:Projector takes 52.5mm diameter object lenses Other lenses available*Lens options:45, 60, 85, 120, 150Focus:ManualLight Source:120W LEDBrightness Output:8000 LumensIlluminance at 1 m:3800 LuxColour temperature (Kelvin):7500 KColour of Projector:BlackGobo Size:50mm o/d gobo fitted into an OPTI cassette bearing. Image size: 40mmControl:Manual. DMX AdapterRemote control:Dimming, contol of all effect paramaters.Protection RatingIP 65 with front cover fitted. Suitable for outdoor use.Power Supply:Mains adaptor 28V at 5A. (Adaptors not to IP 65).Dimension of projector:L34 H25 W14 0D10 CM	NAME:	[OPTI] GoboPro+ LED Projector
Lens Size:Projector takes 52.5mm diameter object lenses Other lenses available*Lens options:45, 60, 85, 120, 150Focus:ManualLight Source:120W LEDBrightness Output:8000 LumensIlluminance at 1 m:3800 LuxColour of Projector:BlackGobo Size:50mm o/d gobo fitted into an OPTI cassette bearing. Image size: 40mmControl:Manual. DMX AdapterRemote control:Dimming, contol of all effect paramaters.Protection RatingIP 65 with front cover fitted. Suitable for outdoor use.Dimension of projector:Li34 H25 W14 0D10 CM	Part Number:	FG2120
Instruction of projector:Projector wates calcium awarder of port backsUnder lenses available*Lens options:45, 60, 85, 120, 150Focus:ManualLight Source:120W LEDBrightness Output:8000 LumensIlluminance at 1 m:3800 LuxColour temperature (Kelvin):7500 KColour of Projector:BlackGobo Size:50mm o/d gobo fitted into an OPTI cassette bearing. Image size: 40mmControl:Manual. DMX AdapterRemote control:Dimming, contol of all effect paramaters.Protection RatingIP 65 with front cover fitted. Suitable for outdoor use.Power Supply:Mains adaptor 28V at 5A. (Adaptors not to IP 65).Dimension of projector:L34 H25 W14 OD10 CM	Gobo Projection:	Static and/or rotating image. Integral Rotator for Cassette.
Lens options:45, 60, 85, 120, 150Focus:ManualLight Source:120W LEDBrightness Output:8000 LumensIlluminance at 1 m:3800 LuxColour temperature (Kelvin):7500 KColour of Projector:BlackGobo Size:50mm o/d gobo fitted into an OPTI cassette bearing. Image size: 40mmControl:Manual. DMX AdapterRemote control:Dimming, contol of all effect paramaters.Protection RatingIP 65 with front cover fitted. Suitable for outdoor use.Power Supply:La3 H25 W14 0D10 CM	Lens Size:	Projector takes 52.5mm diameter object lenses
Focus:ManualLight Source:120W LEDBrightness Output:8000 LumensIlluminance at 1 m:3800 LuxColour temperature (Kelvin):7500 KColour of Projector:BlackGobo Size:50mm o/d gobo fitted into an OPTI cassette bearing. Image size: 40mmControl:Manual. DMX AdapterRemote control:Dimming, contol of all effect paramaters.Protection RatingIP 65 with front cover fitted. Suitable for outdoor use.Power Supply:L34 H25 W14 OD10 CM		Other lenses available*
Forder.Item and the second	Lens options:	45, 60, 85, 120, 150
Brightness Output:8000 LumensIlluminance at 1 m:3800 LuxColour temperature (Kelvin):7500 KColour of Projector:BlackGobo Size:50mm o/d gobo fitted into an OPTI cassette bearing. Image size: 40mmControl:Manual. DMX AdapterRemote control:Dimming, contol of all effect paramaters.Protection RatingIP 65 with front cover fitted. Suitable for outdoor use.Power Supply:Mains adaptor 28V at 5A. (Adaptors not to IP 65).Dimension of projector:L34 H25 W14 0D10 CM	Focus:	Manual
Illuminance at 1 m:   3800 Lux     Colour temperature (Kelvin):   7500 K     Colour of Projector:   Black     Gobo Size:   50mm o/d gobo fitted into an OPTI cassette bearing. Image size: 40mm     Control:   Manual. DMX Adapter     Remote control:   Dimming, contol of all effect paramaters.     Protection Rating   IP 65 with front cover fitted. Suitable for outdoor use.     Power Supply:   Mains adaptor 28V at 5A. (Adaptors not to IP 65).     Dimension of projector:   L34 H25 W14 0D10 CM	Light Source:	120W LED
Colour temperature (Kelvin):7500 KColour of Projector:BlackGobo Size:50mm o/d gobo fitted into an OPTI cassette bearing. Image size: 40mmControl:Manual. DMX AdapterRemote control:Dimming, contol of all effect paramaters.Protection RatingIP 65 with front cover fitted. Suitable for outdoor use.Power Supply:Mains adaptor 28V at 5A. (Adaptors not to IP 65).Dimension of projector:L34 H25 W14 0D10 CM	Brightness Output:	8000 Lumens
Colour of Projector:   Black     Gobo Size:   50mm o/d gobo fitted into an OPTI cassette bearing. Image size: 40mm     Control:   Manual. DMX Adapter     Remote control:   Dimming, contol of all effect paramaters.     Protection Rating   IP 65 with front cover fitted. Suitable for outdoor use.     Power Supply:   Mains adaptor 28V at 5A. (Adaptors not to IP 65).     Dimension of projector:   L34 H25 W14 0D10 CM	Illuminance at 1 m:	3800 Lux
Gobo Size:50mm o/d gobo fitted into an OPTI cassette bearing. Image size: 40mmControl:Manual. DMX AdapterRemote control:Dimming, contol of all effect paramaters.Protection RatingIP 65 with front cover fitted. Suitable for outdoor use.Power Supply:Mains adaptor 28V at 5A. (Adaptors not to IP 65).Dimension of projector:L34 H25 W14 OD10 CM	Colour temperature (Kelvin):	7500 K
Control:   Manual. DMX Adapter     Remote control:   Dimming, contol of all effect paramaters.     Protection Rating   IP 65 with front cover fitted. Suitable for outdoor use.     Power Supply:   Mains adaptor 28V at 5A. (Adaptors not to IP 65).     Dimension of projector:   L34 H25 W14 OD10 CM	Colour of Projector:	Black
Control:Manual. DMX AdapterRemote control:Dimming, contol of all effect paramaters.Protection RatingIP 65 with front cover fitted. Suitable for outdoor use.Power Supply:Mains adaptor 28V at 5A. (Adaptors not to IP 65).Dimension of projector:L34 H25 W14 0D10 CM	Gobo Size:	50mm o/d gobo fitted into an OPTI cassette bearing.
Remote control:   Dimming, contol of all effect paramaters.     Protection Rating   IP 65 with front cover fitted. Suitable for outdoor use.     Power Supply:   Mains adaptor 28V at 5A. (Adaptors not to IP 65).     Dimension of projector:   L34 H25 W14 0D10 CM		Image size: 40mm
Protection Rating   IP 65 with front cover fitted. Suitable for outdoor use.     Power Supply:   Mains adaptor 28V at 5A. (Adaptors not to IP 65).     Dimension of projector:   L34 H25 W14 0D10 CM	Control:	Manual. DMX Adapter
Power Supply:   Mains adaptor 28V at 5A. (Adaptors not to IP 65).     Dimension of projector:   L34 H25 W14 0D10 CM	Remote control:	Dimming, contol of all effect paramaters.
Dimension of projector: L34 H25 W14 0D10 CM	Protection Rating	IP 65 with front cover fitted. Suitable for outdoor use.
	Power Supply:	Mains adaptor 28V at 5A. (Adaptors not to IP 65).
Weight: 3.5 Kg	Dimension of projector:	L34 H25 W14 0D10 CM
	Weight:	3.5 Kg

# GoboPro+ LED

### **Projection Distance**

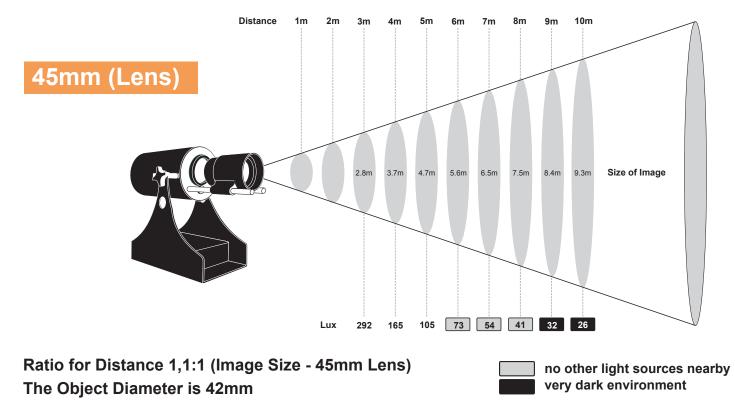


#### **Projection Distance**

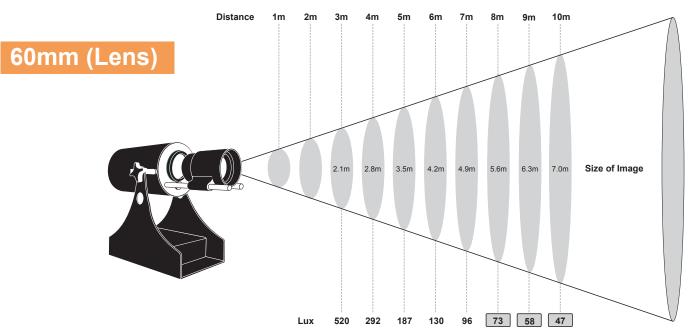

Ratio for Distance 1,4:1 (Image Size - 60mm Lens) no other light sources nearby The Object Diameter is 42mm


# GoboPro+ LED

### **Projection Distance**

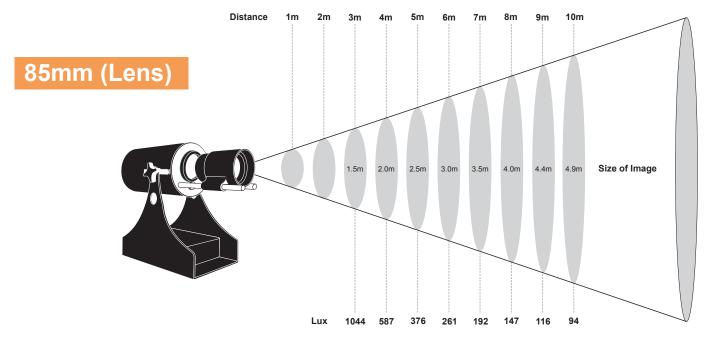

Ratio for Distance 2:1 (Image Size - 85mm Lens) The Object Diameter is 42mm

#### **Projection Distance**

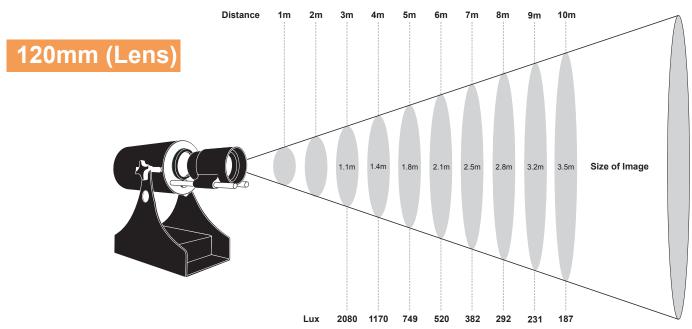

#### Ratio for Distance 2,9:1 (Image Size - 120mm Lens) The Object Diameter is 42mm

# [OPTI] GoboPro+ LED

### **[OPTI]**<sup>™</sup>Kinetics

#### **Projection Distance**

